


# Seal RYT Corporation Pack-RYT™

**Patent  
Pending**

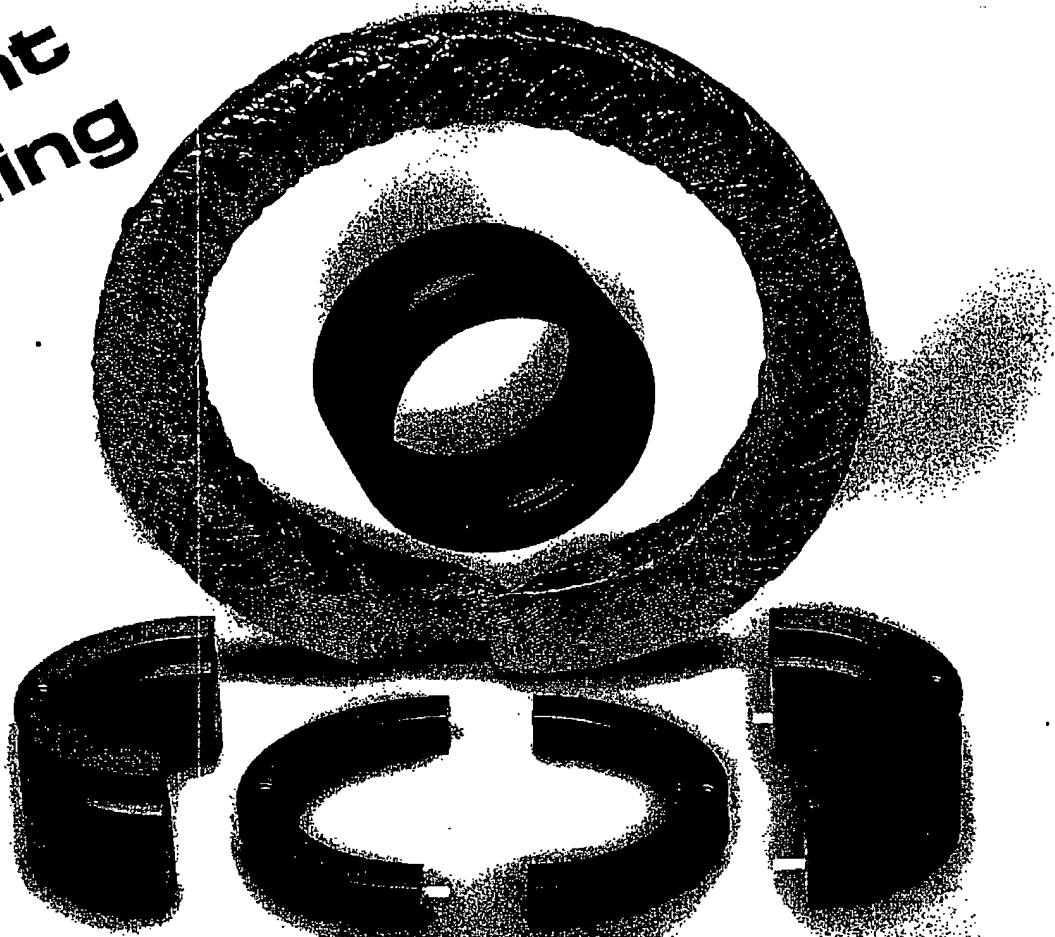

## **MACHINED - IN CLOSE - CLEARANCE BEARING STABILIZES SHAFT**

- ◆ CAVITATION CAUSED DEFLECTION MINIMIZED
- ◆ MINIMAL CLEARANCE SHARPLY THROTTLES
- ◆ ALLOWS LOW-FLOW FLUSH TO KEEP THE
- ◆ SHAFT AREA
- ◆ FLUSH - USE REDUCTION AVERAGES

## **AS FEW AS TWO SEALING RINGS NECESSARY**

- ◆ MINIMAL FRICTION
- ◆ NO LEAKAGE
- ◆ CAN BE ADJUSTED TO ANY SIZE
- ◆ HIGH PERFORMANCE
- ◆ LONG LIFE

## **HIGH PERFORMANCE THERMOPLASTIC BEARING BLOCK**

- ◆ VERY HIGH COMPRESSIVE STRENGTH
- ◆ IMPERVIOUS TO CHEMICALS
- ◆ VIRTUALLY NO DIMENSIONAL GROWTH UP TO
- ◆ 500 DEGREES FAHRENHEIT
- ◆ SPLIT PINNED JOINTS AND PARTS
- ◆ EASY INSTALLATION AND REMOVAL
- ◆ AVAILABLE IN A RANGE OF SIZES
- ◆ LATEX FREE


## **ALTERNATELY BEARING BLOCK CHANNELS**

## **SEAL RYT CORPORATION**

150 Pleasant Street,  
Easthampton, MA 01027 USA  
Tel: (413) 527-6243 • Fax: (413) 527-5846


Received from < 9729487 > at 10/15/03 1:04:30 PM [Eastern Daylight Time]

## REDUCE FLUSH UP TO 90%!!

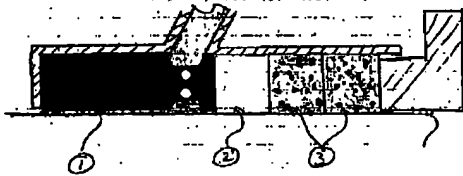


1. Pack-Ryt™ bearing/lantern ring minimizes run-out and deflection while throttling flush flow.
2. Marlo patented 50/52 blocks flush pressure on one side and heat-conductive sealant on the other.
3. Marlo style 396 ultra-pure reinforced exfoliant seals off remaining leakage with minimal friction.

## ELIMINATE FLUSH!!

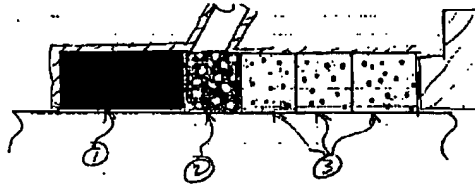


1. Pack-Ryt™ bearing minimizes run-out and deflection.
2. Marlo patented 472 blocks heat conductive sealant.
3. Marlo style 396 ultra-pure reinforced exfoliant seals with minimum friction, maximum heat conductivity.

## ELIMINATE FLUSH, EXTENDED CANTILEVER

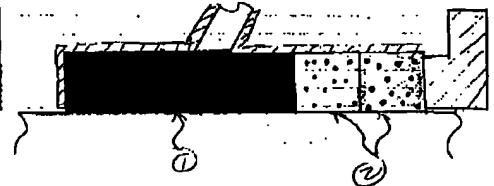


1. Pack-Ryt™ bearing minimizes run-out and deflection.
2. Marlo style 396 ultra-pure reinforced exfoliant seals with minimum friction, maximum heat conductivity.

## REDUCE FLUSH, INTERNAL SELF-ADJUSTING

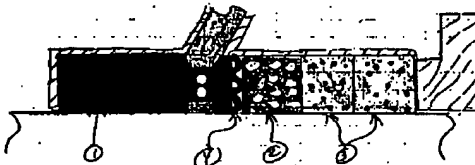


1. Pack-Ryt™ bearing/lantern ring minimizes run-out and deflection while throttling flush flow.
2. Marlo patented 472 blocks flush pressure on one side and compresses the heat-conductive sealant on the other.
3. Marlo style 396 ultra-pure reinforced exfoliant seals off remaining leakage with minimal friction.
4. Stainless steel wave spring, energized by the follower, internally adjusts softer sealants throughout its travel length.

## ELIMINATE FLUSH, SCORED SLEEVE

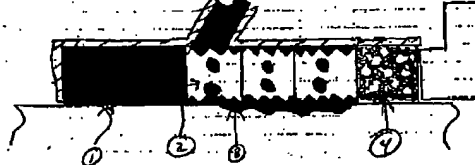

1. Pack-Ryt™ bearing minimizes run-out and deflection.
2. Gator-Cage™ skeleton keeps bearing and outer packing seated and provides structure for injectable.
3. Marlo injectable flows through the Gator-Cage™ to fill irregular surfaces.
4. Marlo patented 472 provides mechanical barrier for Marlo injectable.

## REDUCE FLUSH, MECHANICAL SEAL

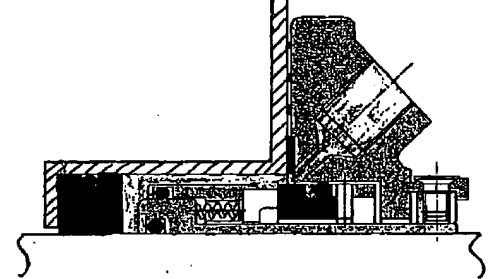

1. Pack-Ryt™ bearing minimizes run-out and deflection which alleviates angular seal face separation.
2. Flush flow substantially reduced due to much closer shaft/bearing clearance than conventional throttle bushings provide.

Please fill in all data!!

Shaft/Sleeve  
Mic. Diameter \_\_\_\_\_"

Bore Mic.  
Diameter \_\_\_\_\_"


Stuffing Box  
Depth \_\_\_\_\_"

RPM \_\_\_\_\_ % Solids \_\_\_\_\_

Media \_\_\_\_\_ Temperature \_\_\_\_\_°F

Media Pressure \_\_\_\_\_ PSI

Received from < 9729487 > at 10/15/03 1:04:30 PM [Eastern Daylight Time]

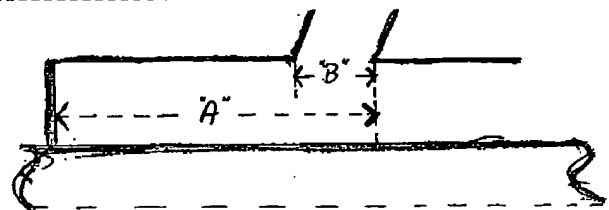

Stuffing Box Bottom to  
Outside Edge of Flush  
Hol (Dim. "A") \_\_\_\_\_"

Diameter of Flush  
Hole (Dim. "B") \_\_\_\_\_"

Equip. Mfr. \_\_\_\_\_

Model # \_\_\_\_\_